
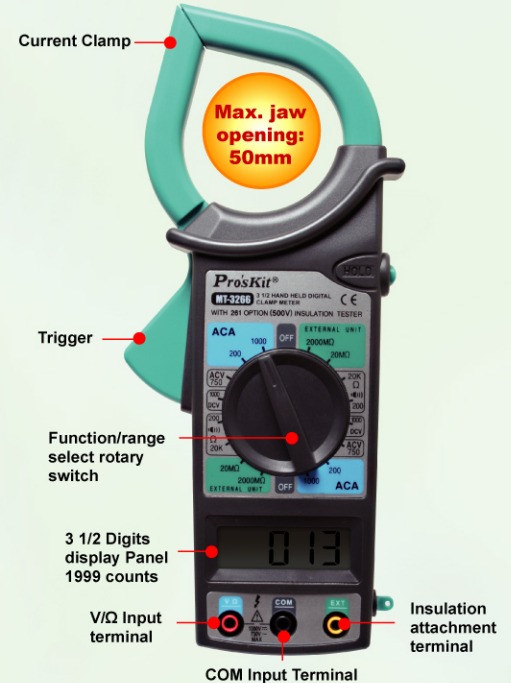


MT-3266

3 1/2 HAND HELD DIGITAL CLAMP METER

Electrical	
Counter	1999
Digits	3 1/2
Backlight	N
DC(V)	1000 V ± (1%+2d)
AC(V)	750 V ± (1.5%+4d)
AC(A)	200A ± (3.0%+5d) 1000A ± (3.0%+5d)
Resistance(Ω)	200Ω ± (2%+2d) 20KΩ ± (1%+1d) 20MΩ ± (2%+2d)
High Resistance(Ω)	2000MΩ < 500M ± (4%+2d) 2000MΩ > 500M ± (5%+2d)
Continuity with beeper	Y
Display hold	Y
Automatic power off	N
Low battery indication	Y
Battery	9V carbon-zinc or alkaline battery (not included)
Size (DxWxH) m	230 x 70 x 37 mm
Weight (g)	240g (without battery)
Operating Temperature & Humidity	0°C~50°C & <80% RH
Storage Temperature & Humidity	-20°C~60°C & <80% RH



MT-3102

3 1/2 2A MINI DIGITAL CLAMP METER

Electrical		Display hold	
Counter	1999	Display hold	Y
Digits	3 1/2	Diode test	Y
Auto/Manual ranging	Both	Automatic power off	Y
Backlight	N	Low battery indication	Y
DC(V)	200m V ± (0.8%+5) 2V/20V/200V ± (0.8%+ 3) 600V ± (1.0%+ 5)	EN61010-1 CAT II	Y
AC(V)	2V/20V/200V ± (1.2%+ 5) 600V ± (1.5%+5)	Battery	3 x 1.5V AAA batteries (not included)
AC(A)	2A ± (4%+20) < 0.4A ± (3.0%+15) 20A ± (3%+15) < 4A ± (2.0%+10) 200A ± (2%+5) 400A ± (2%+5)	Size (DxWxH) mm	203 x 68 x 33 mm
Resistance(Ω)	200 Ω ± (1.2%+5) 2KΩ / 20KΩ / 200KΩ ± (1%+3)	Weight (g)	190g (without batteries)
High Resistance(Ω)	2MΩ ± (1.2%+5) 20MΩ ± (1.5%+5)	Test leads	Y
Temperature °C/°F	-40°C~1000°C ± (3%+4) 0°C~400°C ± (1%+3) 400°C~1000°C ± (2%+ 10) -40°F~32°F ± (3%+8) 32°F~752°F ± (1%+6) 752°F~1832°F ± (2%+18)	Operating Temperature & Humidity	0°C~30°C <75%RH 30°C~40°C <70%RH
Continuity with beeper	Y	Storage Temperature & Humidity	40°C~50°C <45% H -20°C~60°C <75% RH



Picture for reference only. Please check with your supplier for exact offers. All specifications are subject to change without notice.