

**GENERAL<sup>®</sup>**


# Pin/Pinless Deep Sensing Moisture Meter

w/ Spherical Sensor and Remote Probe

**Ideal for contractors, woodworkers and homeowners to measure the moisture content of wood and other construction materials**

## Features & Benefits:

- Two measurement modes: Pin and pinless
- Pin mode uses replaceable pins at end of 46 in. cable; pinless mode uses integral ball sensor with up to 4 in. measurement depth
- Optional MP905 deep wall moisture probe is available (see reverse side)
- Displays % WME or relative readings simultaneously on two displays: 0 to 99.9 count jumbo LCD, and 40-dot tri-color LED Bargraph
- Spare pins storage compartment
- Auto-calibrating
- Data hold function
- Low battery warning
- User can set beeper sound, auto power off time, backlight function
- Superior to flat bottom sensors by enabling the user to measure in corners, hard-to-reach areas and narrow spaces
- Small contact area for improved repeatability
- Spherical sensor works on uneven surfaces and corners
- Works at any angle
- Can accommodate wide viewing angle
- Keeps hand away from sensing area, reducing interference

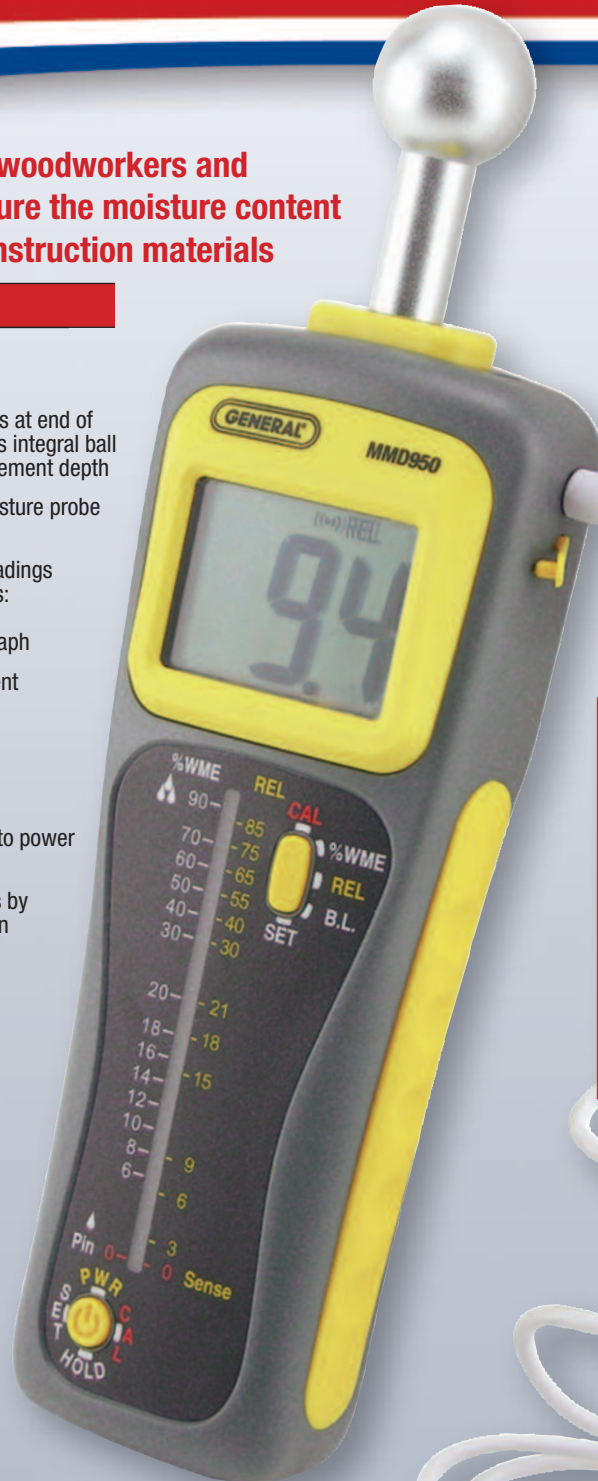

**Locate moisture/water damage deep behind tiles**



**The MMD950 with the optional MP905 Deep Wall Moisture Probe**



**No. MMD950**





# Pin/Pinless Deep Sensing Moisture Meter w/ Spherical Sensor and Remote Probe

## Specifications:

### Measurement Range:

6.0 to 87.6% WME (Wood Moisture Equivalent) and 0.1 to 99.9 REL

### Measurement Accuracy:

±3% of reading + 5 digits in pin mode

### Pin Length/Type:

10mm (0.4 in.) on remote probe; 10mm and 15mm (spares)

### External Probe Cable Length: 46 in. (1.168m)

### Spherical Ball Sensor Measurement Depth:

4 in. (101.6mm)

### Ball Sensor Diameter: 1 in. (25.4mm)

### LCD Digit Height: 0.9 in. (22.9mm)

### LCD Resolution: 0.1%

### LED Bargraph Composition/Colors:

40 dots/green, red, yellow

### Operating Current: 70 mADC max

### Operating Temperature:

32° to 122°F (0° to 50°C)

### Dimensions:

9 x 2.75 x 1.625 in. (229 x 70 x 41mm)

### Weight: 8 oz. (249g)

### Power Source: 1 "9V" battery (included)

## Includes:

Remote Probe, 1 "9V" Battery, 2 Sets of Spare Pins, Hard Carrying Case, User's Manual and 1 Year Limited Warranty

## Optional Accessory:

### Deep Wall Moisture Probe:

Length of Twin Probes with Replaceable Screw-in Tips: 5 in. (127mm)

Diameter of Probes: 0.14 in. (3.6mm)

Probe Hardness: 60 HRC (Hardness Rockwell "C" scale)

Length of Probe Cable: 56 in. (1.4m)



No. MMD950



Check for moisture damage deep below carpet surface



Locates moisture under bathroom floors



Locates moisture under bathroom vanities where mold thrives



Check for moisture in masonry



General Tools & Instruments

80 White Street, New York, NY 10013-3567

TEL: 212. 431. 6100 TOLL FREE: 800. 697. 8665

sales@generaltools.com www.generaltools.com

MMD950SS Printed in USA 02/14