

FEATURES & BENEFITS

- ▶ Digital readout of elevation provides a numeric display of ± 2 inches (± 5 cm)
- ▶ Readout is displayed on the large front and rear LCDs and shows exactly how far the elevation is from on-grade
- ▶ Accurate measurements can be made without moving the rod clamp
- ▶ 5-inch (127 mm) reception height, allows quick acquisition of laser beam
- ▶ Protective over-molding allows it to withstand a drop of 10 feet (3 meters) onto concrete
- ▶ Five accuracy settings
- ▶ Dust and waterproofed to IP67 standards
- ▶ Patented anti-strobe sensor prevents construction lights from giving faulty signals
- ▶ Highly visible LEDs on the front show red for high and low and green for on-grade
- ▶ Patented universal reversible clamp fits square and oval rods included

APPLICATIONS


- ▶ Construction



www.surveying.com

Long Receiver Window Makes Jobs Quicker and More Accurate

AT1994000-02/AT1994000-09
Apache Storm® Laserometer®

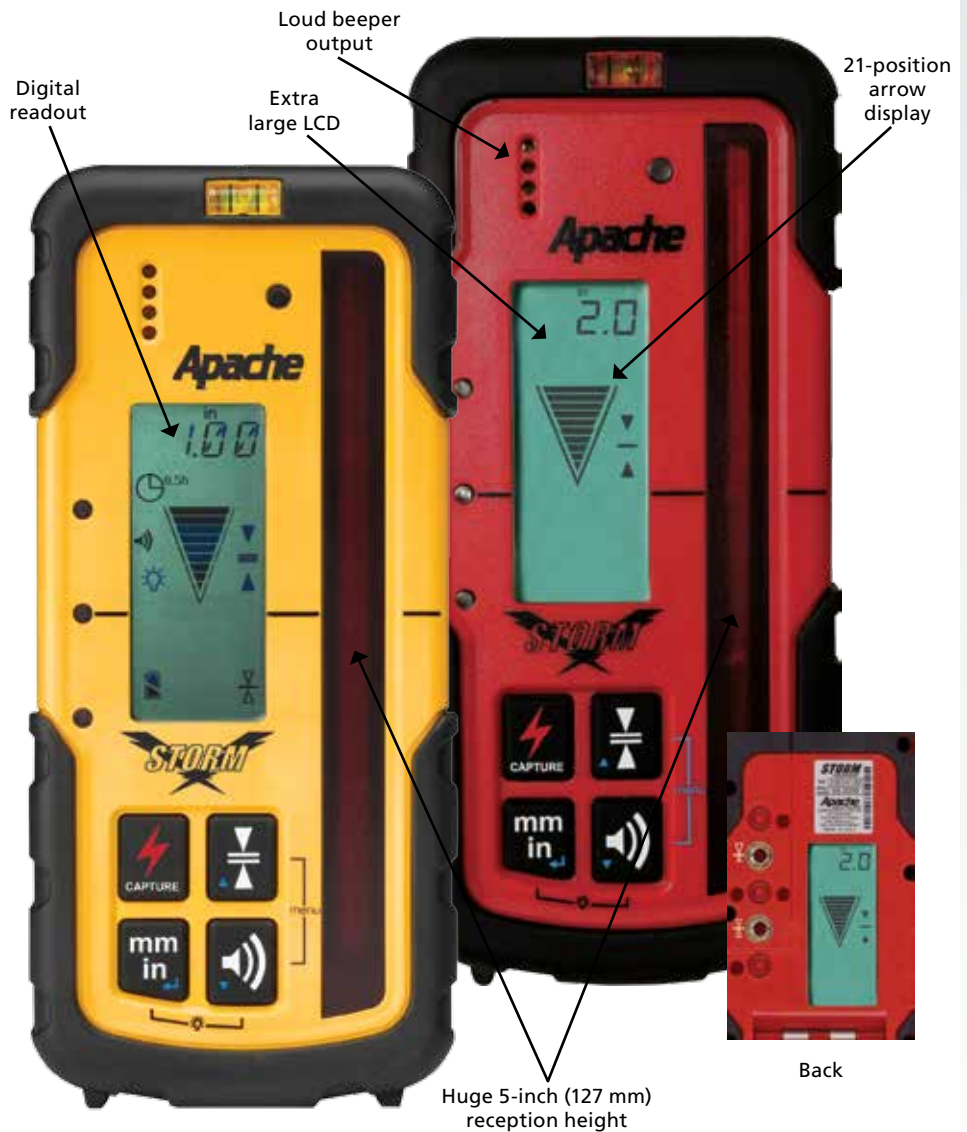

PART NO.	COLOR	WEIGHS W/BATTERIES	WEIGHS W/BATTERIES & CLAMP
AT1994000-02	Red	0.85 lb (0.38 kg)	1.20 lb (0.54 kg)
AT1994000-09	Yellow	0.85 lb (0.38 kg)	1.20 lb (0.54 kg)

Contact your local SECO dealer today!