


The Thermo Scientific Orion Star A223 RDO/Dissolved Oxygen Portable Meter makes necessary testing easier. Its durability and dependability make it a great choice for samples every day, anywhere.

Thermo Scientific Orion Star A223 RDO/Dissolved Oxygen Portable Meter

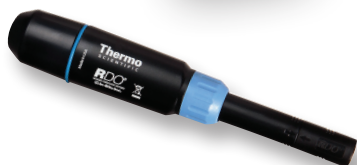

Get the readings that you need where you need them with the Thermo Scientific Orion Star A223 RDO/Dissolved Oxygen Portable Meter. The large, backlit graphic LCD display shows dissolved oxygen in percent saturation or concentration with temperature and electrode status, time, date and calibration points.

Features and Benefits

- Anyone can use this meter with its plain language screen prompts, soft keys that update for easy selection and a multilanguage interface that supports English, Spanish, French, Italian, German and Chinese
- No need to worry about DO probe compatibility – the meter accepts and automatically recognizes Orion polarographic and RDO optical/luminescence-based probes
- Accurate results are easy with automatic temperature, manual salinity and automatic/manual barometric pressure compensation
- Don't miss a reading – AUTO-READ™ locks in the stable reading on your screen and ready indicator alerts when readings are stable
- Calibrate using water-saturated air, air-saturated water, a Winkler titration or zero point calibration
- Non-volatile memory holds up to 1000 data points with time and date stamp
- Easily transfer data and keep meter software up-to-date with the USB and RS232 ports and complimentary data analysis software
- Four AA batteries (included) provide over 800 hours of operation or purchase the universal power adapter (sold separately) to use AC power
- Perfectly portable, waterproof and protected to take anywhere with a IP67-rated housing
- 3 year meter replacement warranty

Thermo Scientific Orion Star A223 RDO/Dissolved Oxygen Portable Meter

Specifications



Dissolved Oxygen	Concentration - Polarographic	
	Range	0 to 90 mg/L
	Resolution	0.01, 0.1
	Relative Accuracy	±0.2
	% Saturation - Polarographic	
	Range	0 to 600
	Resolution	0.1, 1
	Relative Accuracy	±2 %
	Concentration - RDO	
	Range	0 to 50 mg/L
	Resolution	0.01, 0.1
	Relative Accuracy	±0.1 mg/L up to 8 mg/L; ±0.2 mg/L from 8 to 20 mg/L; 10 % of reading from 20 to 50 mg/L
	% Saturation - RDO	
Temperature	Range	0 to 50 °C, 32 to 122 °F
	Resolution	0.1
	Relative Accuracy	±0.1
	Offset Calibration	1 point
Datalogging	Memory	1000 with time and date stamp
	Log Function	Manual, Automatic with AUTO-READ™
	Log Edit	Delete last reading or all
Inputs	DO with Temperature Probe	9-pin mini-DIN
Output		RS232, USB
Power	AC Adapter	Optional – universal, 100-240 VAC
	Battery Power	Included – 4 AAs
	Battery Life	800 hrs

Ordering Information

Cat. No.	Description
STARA2230	Orion STAR A223 RDO/Dissolved Oxygen Portable Meter - Four AA batteries (installed)
STARA2235	Orion STAR A223 RDO/Dissolved Oxygen Portable Meter Kit - 087010MD Orion RDO optical/luminescence-based probe with 3m cable, stainless steel guard, calibration sleeve and optical/luminescence-based cap - Protective armor with electrode holder - Hard carrying case - Four AA batteries (installed)
Accessories	
STARA-CS	Hard carrying case for Orion Star A-series portable meters
STARA-AR	Armor for Orion Star A-series portable meters, includes electrode holders for pH, conductivity and DO probes
STARA-ESCD	Conductivity and DO probe holder for Orion Star A-series armor
STARA-ESPH	pH electrode holder for Orion Star A-series armor
1010003	Optional universal power adapter, 100-240 V, 50/60 Hz
087010MD	Orion RDO optical DO probe, 3m cable with stainless steel guard and calibration sleeve
087020MD	Orion RDO optical DO probe, 6m cable with stainless steel guard and calibration sleeve
087030MD	Orion RDO optical DO probe, 10m cable with stainless steel guard and calibration sleeve
087050MD	Orion RDO optical DO probe, 15m cable with stainless steel guard and calibration sleeve
087100MD	Orion RDO optical DO probe, 30m cable with stainless steel guard and calibration sleeve
083005MD	Orion polarographic DO probe, 1.5m cable
080513	Orion polarographic DO probe maintenance kit
080514	Orion polarographic DO probe electrolyte solution, 60 mL
080017	Calibration sleeve for Orion polarographic DO probes
087003	Replacement calibration sleeve for Orion RDO optical probes
087001	Replacement optical cap for Orion RDO probes

For more information, contact your local Thermo Scientific products dealer or call our customer and technical service experts at 1-800-225-1480 (for the US and Canada) or visit www.thermoscientific.com/water.

©2011 Thermo Fisher Scientific Inc. All rights reserved. All trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. ROSS and the COIL tradenames are trademarks of Thermo Fisher Scientific Inc. US Patent 6,793,787.



S-STARA223-E-1011-RevB

Water Analysis Instruments
www.thermoscientific.com/water

North America
166 Cummings Center
Beverly, MA 01915 USA
Toll Free: 1-800-225-1480
Tel: 1-978-232-6000
info.water@thermo.com

Netherlands
Tel: (31) 033-2463887
info.water.uk@thermo.com
China
Tel: (86) 21-68654588
wai.asia@thermofisher.com

India
Tel: (91) 22-4175-8800
wai.asia@thermofisher.com
Singapore
Tel: (65) 6778-6876
wai.asia@thermofisher.com

Japan
Tel: (81) 045-453-9175
wai.asia@thermofisher.com

Australia
Tel: (613) 9757-4300
infowaterau@thermofisher.com

Thermo
SCIENTIFIC