


GMP252 Carbon Dioxide Probe for ppm-level measurements

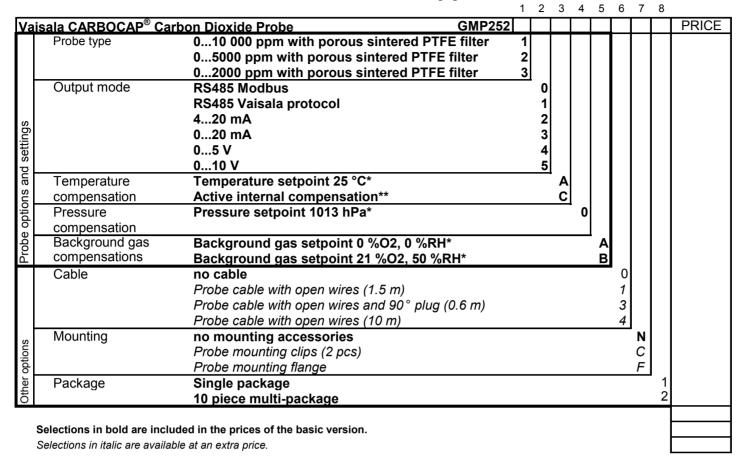

^{*)} Compensation setpoint values can be updated via RS485 communications

Examples of order codes with typical settings:

		1	2	3	4	5	6	7	8
Standard CO ₂ Probe for demanding HVAC application	GMP252	2	2	Α	0	Α	1	N	1
		1	2	3	4	5	-6	7	- 8

End customer:

<u>Accessories</u>	<u>ltem code</u>
Porous sintered PTFE filter for GMP252	DRW244221SP
Probe cable with open wires (1.5 m)	223263SP
Probe cable with open wires and 90° plug (0.6 m)	244669SP
Probe cable with open wires (10 m)	216546SP
Probe mounting clips (2 pcs)	243257SP
Probe mounting flange	243261SP
USB cable for PC connection	242659
MI70 connection cable for probe	CBL210472
MI70 flat cable for GMP250 probes, M12-5pin	CBL210493SP
Calibration adapter	DRW244827SP

^{**)} Uses the probe internal temperature sensing, accuracy limited to ±3 °C in typical installation conditions