

LINE IT UP ALL AROUND

Line • Línea • Ligne
165 ft • ±1/8 in
Range • Accuracy
50 m • ±3 mm
Distance • Précision • Portée • Précision

LEVEL YOUR WORLD

GCL 2-160
Self-Leveling Cross-Line Laser
with Plumb Points



BOSCH
Invented for life

SELF-LEVELING CROSS-LINE LASER WITH PLUMB POINTS

GCL 2-160

Line • Línea • Ligne
165 ft • ±1/8 in*
Range • Accuracy
50 m • ±3 mm*
Alcance • Precisión • Portée • Précision

ALL-IN-ONE FUNCTIONALITY
Offers highly visible thin lines and points for horizontal leveling, vertical alignment and plumb point transfers

BRIGHT LASER LINES
Provides a visible range of up to 65 ft. with an accuracy of 1/8"

ROBUST OVER-MOLDED CONSTRUCTION
Supplies IP54 splash water/dust protection, for years of dependable operation


BUILT-IN HEAVY-DUTY MAGNETS
For secure attachment to metal surfaces. Ideal for ceiling grid applications. Located on back of RM 1 or RM 2 mounts

LONG VERTICAL LASER LINE
Extends line visibility behind tool to almost 360° vertical plane when placed next to a wall


RM 1 ROTATING MAGNETIC MOUNT
Rotates 360° while staying centered on the plumb point

SECURE TRANSPORT LOCK
Manual mode integrated for use of laser at any angle

SMART PENDULUM SYSTEM
Self-levels and indicates out-of-level condition, locks when switched off

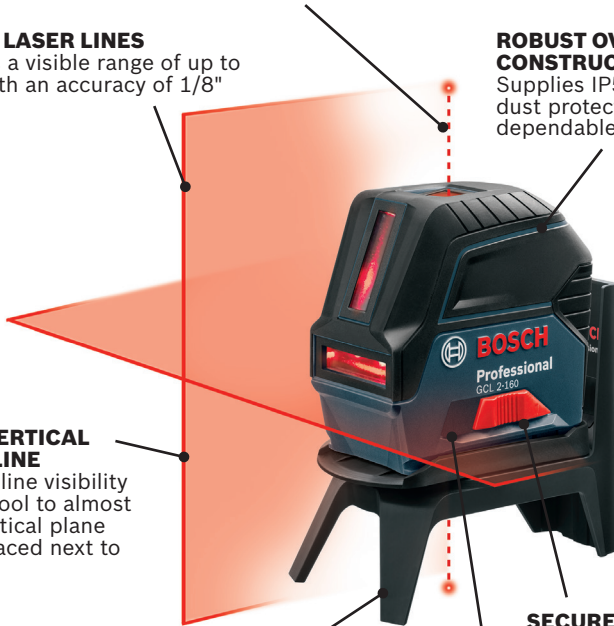

VISIMAX™ TECHNOLOGY
Monitors power consumption to maximize line visibility and extend battery life

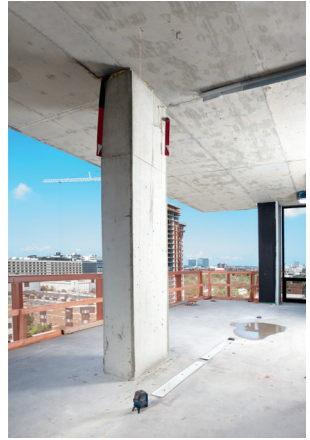

SPECIFICATIONS

*ACCURACY LINE	1/8" at 33 ft.
ACCURACY POINT	9/32" at 33 ft.
RANGE (UP TO)	65 ft.
RANGE POINT (UP TO)	33 ft.
*RANGE (UP TO) WITH OPTIONAL RECEIVER (DIAMETER)	165 ft.
LEVELING TYPE, RANGE	Self-leveling, up to $\pm 4^\circ$
LASER DIODE	Class 2, 630-650 nm, <1 mW
MOUNT THREADING	1/4"-20 and 5/8"-11
BATTERY TYPE	(3) AA batteries
OPERATING TEMPERATURE	14° F–122° F (-10° C–50° C)
DIMENSIONS	4.4" x 2.2" x 4.2"
WEIGHT	1.08 lbs.

INCLUDES


GCL 2-160	Magnetic rotating mount RM 1 , positioning device BM3 , laser target plate, (3) AA batteries, carry case
GCL 2-160 + LR 6	Line laser receiver LR 6 , mounting bracket for LR 6, magnetic rotating mount RM 1 , ceiling grid clip, laser target plate, (3) AA batteries for GCL 2-160, (2) AAA batteries for LR 6, L-BOXX-2 carrying case



GCL 2-160



GCL 2-160 + LR 6

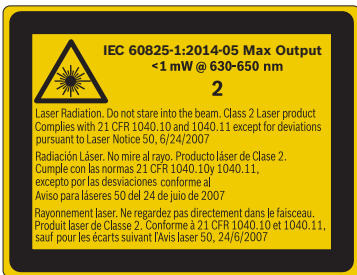

Robert Bosch Tool Corporation

1800 W. Central Rd.
Mount Prospect, IL 60056
www.boschtools.com

2016-150